

POWER

1600 SERIES INLINE OPTICAL POWER METER

SPECIFICATION SHEET

AVAILABLE IN PXI


AVAILABLE IN MatriQ

Quantifi Photonics' Power 1600 Series inline optical power meters provides quick and accurate inline power monitoring.



Simple, intuitive operation with cohesionUI

Control the Power-PXIe from your PC or mobile device. Plus, large format view mode makes it easy to monitor your instrument even when working away from your desk.




2 power meters in a single instrument

Achieve high channel density with up to 34 channels in an 18-slot PXI chassis.



Suitable for high power measurements

Suitable for high power measurements from -50 dBm to +20 dBm



Low insertion loss

Maximise your power budget with low insertion loss.


TARGET APPLICATIONS

- Fiber optic manufacturing test.
- Power measurement integration for automated test systems.
- Fiber optic laser test and characterization.
- General and versatile R&D and production tool.

PXI's integrated timing and hardware triggering capabilities allow the user to synchronize a variety of instruments through the trigger bus and system reference clock features of the PXI platform. This offers a number of advantages over more traditional software-initiated measurements.

- True parallel measurements of multiple devices under test allows you to scale your manufacturing and decrease the test time per DUT.
- Extremely low latency allows you to capture fast events or measure your DUTs very quickly.
- Precise timing alignment between optical and electrical modules gives you control of trigger events to occur exactly when required.

Each slot can create a trigger and the trigger event can be transferred through each PXI Trigger line. Configuring the trigger line can be done easily through NI MAX software interface for the PXIe mainframe.

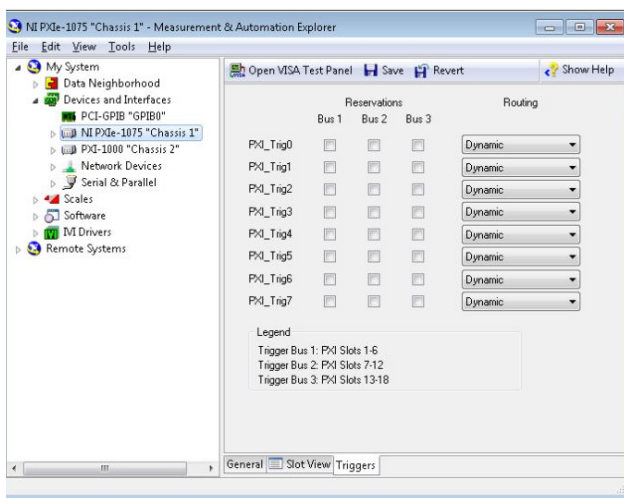

	Reservations			Routing
	Bus 1	Bus 2	Bus 3	
PXI_Trig0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Dynamic
PXI_Trig1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Away From Bus 2
PXI_Trig2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Away From Bus 2
PXI_Trig3	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Away From Bus 2
PXI_Trig4	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Away From Bus 2
PXI_Trig5	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Away From Bus 2
PXI_Trig6	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Away From Bus 2
PXI_Trig7	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Away From Bus 2

Legend
Trigger Bus 1: PXI Slots 1-6
Trigger Bus 2: PXI Slots 7-12
Trigger Bus 3: PXI Slots 13-18

Our expanding range of PXle optical test solutions are used by customers in mixed-signal test and measurement systems, reducing complexity, lowering the cost of test and accelerating time to market.

- Multi vendor, open standard with over 1500 PXI modules available
- Advanced timing and synchronization capabilities across instruments
- Low latency, high performance processing and fast data throughput
- Design and build scalable, high channel count systems
- Small footprint and lower power consumption



MATRIQ – COMPACT & PORTABLE

The MATRIQ series provides the same high-performance test capabilities of our PXle modules in an compact benchtop design. MATRIQ instruments are simple to setup and easy to operate, making them the perfect choice for your optical lab or test bench.

- Same performance and control as our PXle modules
- Plug and play with USB or Ethernet connectivity
- Control via the web-based GUI, COHESIONUI, LabVIEW or SCPI commands
- Compact and portable design saves benchtop space




POWER 1600 SERIES TECHNICAL SPECIFICATIONS

PXI – MODULAR





POWER-1601-2-FC-PXIE

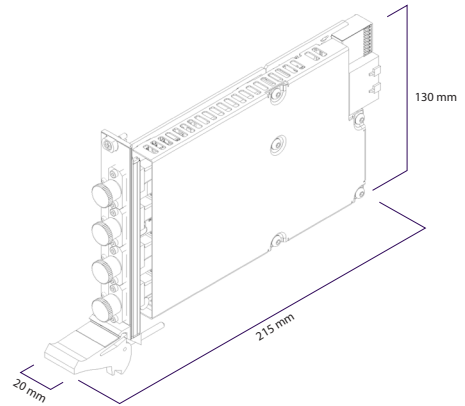

MATRIQ – COMPACT & PORTABLE



POWER-1601-2-FC-MTRQ

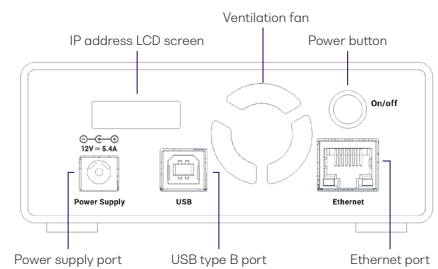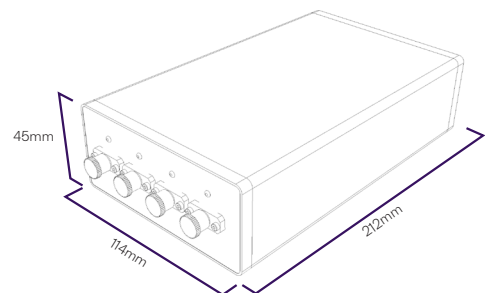

POWER 1600 SERIES TECHNICAL SPECIFICATIONS


General Specifications	PXI	MATRIQ
Bus connection	PXIe	USB and Ethernet
Optical connector type	FC/APC, FC/PC, SC/PC, SC/APC	FC/APC, FC/PC, SC/PC, SC/APC
Slot count	1	-
Dimensions (HxWxD)	130 mm x 20 mm x 215 mm 5.1" x 0.8" x 8.5"	45 x 114 x 212 mm 1.7 x 4.5 x 8.3 inch
Weight	~0.4kg ~0.88 lbs	~ 1.1 kg ~ 2.4 lbs
Operating temperature range	5 °C to 45 °C 41 °F to 113 °F	5 °C to 45 °C 41 °F to 113 °F
Storage temperature range	-40 °C to 70 °C -40 °F to 158 °F	-40 °C to 70 °C -40 °F to 158 °F

Model Number	1601	1611	1601	1611
Number of channels	2	2	2	2
Sensor	Inline	Inline	Inline	Inline
Wavelength range	1260 to 1650 nm	800 to 900 nm	1260 to 1650 nm	800 to 900 nm
Power	-50 to +20 dBm	-50 to +20 dBm	-50 to +20 dBm	-50 to +20 dBm
Damage level ⁹	+24 dBm	+23 dBm	+24 dBm	+23 dBm
Uncertainty at reference conditions ^{2,3,5}	± 0.34 dB (Typical) ± 0.55 dB (Max)	-	± 0.34 dB (Typical) ± 0.55 dB (Max)	-
Linearity ^{2,5}	± 0.1 dB, -40 to 0 dBm ± 0.15 dB, -50 to -40 dBm	± 0.25 dB, 0 to -30dBm	± 0.1 dB, -40 to 0 dBm ± 0.15 dB, -50 to -40 dBm	± 0.25 dB, 0 to -30dBm
Insertion loss	± 0.15 dB (Typical) ³ ± 0.25 dB (Max) ³	± 0.15 dB (Typical) ³ ± 0.25 dB (Max) ³	± 0.15 dB (Typical) ³ ± 0.25 dB (Max) ³	± 0.15 dB (Typical) ³ ± 0.25 dB (Max) ³
Return loss	> 50 dB ⁶	> 20 dB ⁷	> 50 dB ⁶	> 20 dB ⁷
Averaging time	0.01 Hz to 12 kHz	0.01 Hz to 12 kHz	0.01 Hz to 12 kHz	0.01 Hz to 12 kHz
Data logging capability	Yes	Yes	Yes	Yes
External trigger	Yes	Yes	No	No

Notes

- Specifications are valid at 23 °C ± 3 °C.
- +10 dBm to -40 dBm, 23 °C.
- Excluding connectors, add 0.2 dB for SMF and 0.1 dB for MMF per connector.
- < 10 dB attenuation.
- At calibration wavelengths.
- 1550 nm ± 30 nm, standard single-mode fiber, angled connector 8°, T=23 °C ± 5 °C.
- 850 nm ± 30 nm, standard single mode fiber, angled connector 8°, T=23 °C ± 5 °C.
- ORL specifications require output port to be terminated into high ORL termination and/or into a fiber network with >60dB optical return loss.
- 20 minute exposure.

ORDERING INFORMATION

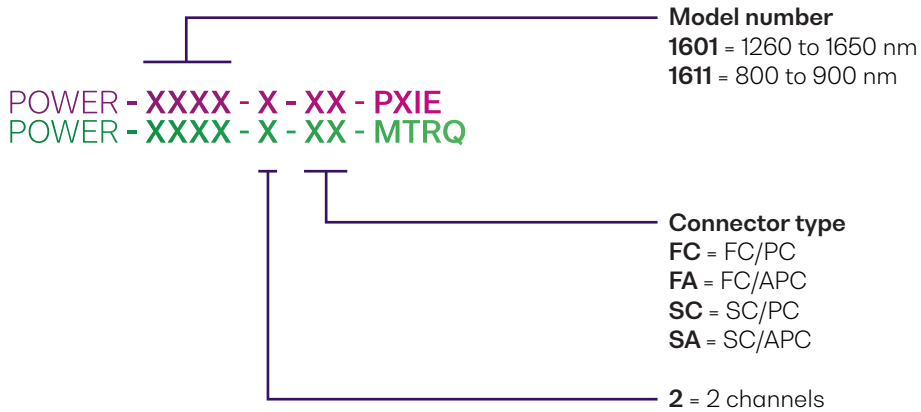

WARRANTY INFORMATION

This product comes with a standard 3 year warranty.

An optional 5 year extended warranty is also available, please discuss with your sales representative at the time of purchase.

Our portfolio of optical and electrical test modules is rapidly expanding to meet a wide range of customer requirements and applications.

Tunable Laser Sources

Versatile telecom laser sources with full tunability across C or L bands. Narrow 100 kHz linewidth, up to 16.5 dBm of power, optional whisper mode to disable frequency dither.

Erbium-Doped Fiber Amplifier (EDFA)

High power Erbium-Doped Fiber Amplifier for signal power amplification in C and L bands with various control modes, including automatic gain control.

Fixed Wavelength Laser Sources

Highly customizable DFB or FP laser sources available in a wide range of wavelengths and powers. Models support SMF, MMF and PMF.

Variable Optical Attenuator (VOA)

Fast attenuation speed with low insertion loss and built-in power monitoring. Operates in fixed attenuation or constant output power modes. Models support SMF, MMF and PMF.

Optical Power Meters

Fast terminating or inline monitoring of optical signal power from -60 to +10 dBm across 750 – 1700 nm wavelengths. Model with logarithmic analog output for applications such as silicon photonics fiber alignment.

Optical Spectrum Analyzer (OSA)

Low cost, fast spectral measurement in a compact module with built-in analysis including SMSR, OSNR and spectral width. Targeted wavelengths for specific applications in O band, C band and L band.

Optical-to-Electrical Converter

High bandwidth, broadband O-to-E converter. Available in a range of configurations; choose from 1 or 2 channels, AC or DC coupling and various conversion gain and operating wavelength ranges.

Bit Error Rate Tester (BERT)

2 or 4-channel Pulse Pattern Generator and Error Detector at rates up to 29 Gbps for the design, characterization and production of optical transceivers and opto-electrical components.

Pulse Pattern Generator (PPG)

4 channel Pulse Pattern Generator from 0.3 to 30 Gbps for high-density multichannel applications. With integrated clock synthesizer and programmable de-emphasis and CTLE processor.

Optical Switch

Proven reliability and fast switching time. Wide variety of switch configurations: 1x4, 1x16, 16x16 and more. Models support SMF, MMF and PMF.

Polarization Controller & Scrambler

High-speed automated polarization control with broad wavelength coverage from 1260nm to 1650nm, low insertion loss and back reflection. Full remote control via intuitive GUI, LabVIEW or SCPI.

Photonic Doppler Velocimeter (PDV)

Purpose-built module for Photonic Doppler Velocimetry (PDV). A circulator, two VOAs and a passive coupler all built into one compact module.

Passive Component Integration

Integrate passive optical components of your choice such as WDM couplers, splitters, band-pass filters, PM beamsplitters and circulators. Models support SMF, MMF and PMF.

Passive Component Storage

Protect and store your own passive fiber optic components such as splitters, connector adaptor patchcords, WDM couplers, and isolators in one handy module.

PXI – TEST MODULES

MATRIQ – TEST MODULES

We provide these products as PXIe modules and compact MATRIQ benchtop instruments.

See our website for more details
quantifiphotonics.com/products

Test. Measure. Solve.

Quantifi Photonics is transforming the world of photonics test and measurement. Our portfolio of optical and electrical test instruments is rapidly expanding to meet the needs of engineers and scientists around the globe. From enabling ground-breaking experiments to driving highly efficient production testing, you'll find us working with customers to solve complex problems with optimal solutions.

To find out more, get in touch with us today.

General Enquiries
Technical Support
Phone
North America

sales@quantifiphotonics.com
support@quantifiphotonics.com
+64 9 478 4849
+1-800-803-8872



[quantifiphotonics.com](https://www.quantifiphotonics.com)

QUANTIFI
PHOTONICS™