

# POWER

## 1400 SERIES OPTICAL POWER METER


SPECIFICATION SHEET

AVAILABLE IN PXI

AVAILABLE IN MatriQ


Quantifi Photonics' Power 1400 Series optical power meter provides fast monitoring of signal power from -60 to +10 dBm and broad wavelength range of 750 to 1700 nm.

With a logarithmic amplifier, it avoids gain-jumps faced by multi-stage linear amplifier power meters.



### Data Logging Capability

Data logging of up to 1024 samples is available on 2 channels, so you can capture transient events with ease.



### Single logarithmic amplifier

Use of a logarithmic amplifier eliminates the gain jumps exhibited by power meters with multi-stage linear amplifiers. Get consistent and reliable measurement at all power levels.



### Simple, intuitive operation with COHESIONUI

Control the Power-PXIe from your PC or mobile device. Plus, large format view mode makes it easy to monitor your instrument even when working away from your desk.



### Seamless PXI integration

Take advantage of PXI's integrated triggering and synchronization capabilities across electrical and optical instruments.



### 2 or 4 power meters in a single instrument

Achieve high channel density with up to 68 channels in an 18-slot PXI chassis or 4 channels in an ultra-compact benchtop instrument.

- Fiber optic manufacturing test.
- Power measurement integration for automated test systems.
- Fiber optic laser test and characterization.
- General and versatile R&D and production tool.


## HARDWARE TRIGGERING IN PXI

### Integrated hardware triggering

PXI's integrated timing and hardware triggering capabilities allow the user to synchronize a variety of instruments through the trigger bus and system reference clock features of the PXI platform. This offers a number of advantages over more traditional software-initiated measurements.

- True parallel measurements of multiple devices under test allows you to scale your manufacturing and decrease the test time per DUT.
- Extremely low latency allows you to capture fast events or measure your DUTs very quickly.
- Precise timing alignment between optical and electrical modules gives you control of trigger events to occur exactly when required.

Each slot can create a trigger and the trigger event can be transferred through each PXI Trigger line. Configuring the trigger line can be done easily through NI max software interface for the PXIe mainframe.

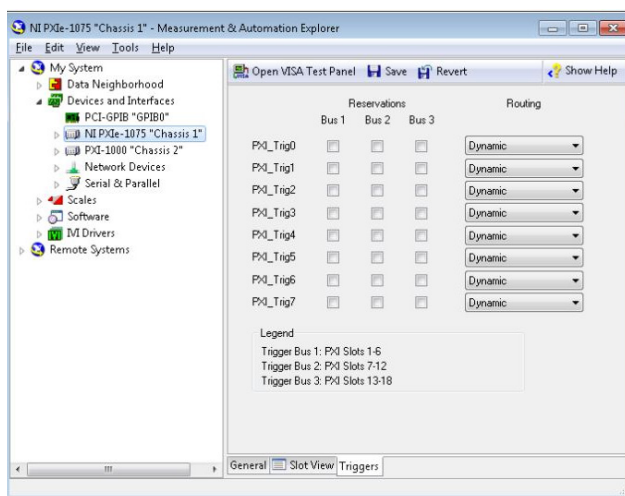

	Reservations			Routing
	Bus 1	Bus 2	Bus 3	
PXI_Trig0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Dynamic
PXI_Trig1	<input checked="" type="checkbox"/>	←	→ <input checked="" type="checkbox"/>	Away From Bus 2
PXI_Trig2	<input checked="" type="checkbox"/>	←	→ <input checked="" type="checkbox"/>	Away From Bus 2
PXI_Trig3	<input checked="" type="checkbox"/>	←	→ <input checked="" type="checkbox"/>	Away From Bus 2
PXI_Trig4	<input checked="" type="checkbox"/>	←	→ <input checked="" type="checkbox"/>	Away From Bus 2
PXI_Trig5	<input checked="" type="checkbox"/>	←	→ <input checked="" type="checkbox"/>	Away From Bus 2
PXI_Trig6	<input checked="" type="checkbox"/>	←	→ <input checked="" type="checkbox"/>	Away From Bus 2
PXI_Trig7	<input checked="" type="checkbox"/>	←	→ <input checked="" type="checkbox"/>	Away From Bus 2

Legend

Trigger Bus 1: PXI Slots 1-6

Trigger Bus 2: PXI Slots 7-12

Trigger Bus 3: PXI Slots 13-18

Our expanding range of PXIe optical test solutions are used by customers in mixed-signal test and measurement systems, reducing complexity, lowering the cost of test and accelerating time to market.

- Multi vendor, open standard with over 1500 PXI modules available
- Advanced timing and synchronization capabilities across instruments
- Low latency, high performance processing and fast data throughput
- Design and build scalable, high channel count systems
- Small footprint and lower power consumption



## MATRIQ – COMPACT &amp; PORTABLE

The MATRIQ series provides the same high-performance test capabilities of our PXIe modules in an compact benchtop design. MATRIQ instruments are simple to setup and easy to operate, making them the perfect choice for your optical lab or test bench.

- Same performance and control as our PXIe modules
- Plug and play with USB or Ethernet connectivity
- Control via the web-based GUI, COHESIONUI, LabVIEW or SCPI commands
- Compact and portable design saves benchtop space




## POWER 1400 SERIES TECHNICAL SPECIFICATIONS

### PXI – MODULAR





POWER - 1401 - 4 - FC - PXIE

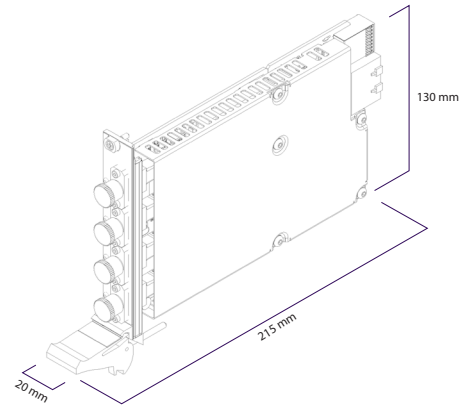

### MATRIQ – COMPACT & PORTABLE



POWER - 1401 - 4 - FC - MTRQ

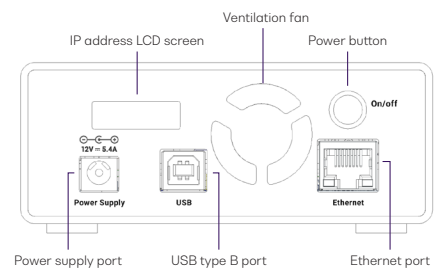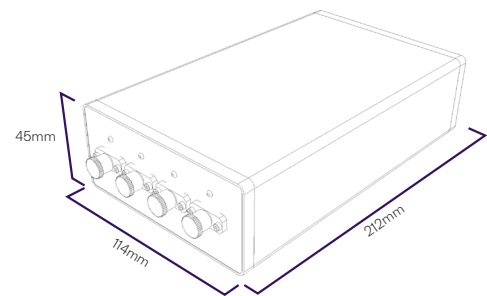

## POWER 1400 SERIES TECHNICAL SPECIFICATIONS

General Specifications	PXI	MATRIQ
Bus connection	PXIe	USB and Ethernet
Optical connectors	FC/APC, FC/PC, SC/PC, SC/APC	FC/APC, FC/PC, SC/PC, SC/APC
Slot count	1	-
Dimensions (HxWxD)	130 mm x 20 mm x 215 mm   5.1" x 0.8" x 8.5"	45 x 114 x 212 mm   1.7 x 4.5 x 8.3 inch
Weight	~ 1 kg   ~2.2 lbs	~ 1.1 kg   ~ 2.4 lbs
Operating temperature range	5 °C to 45 °C   41 °F to 113 °F	5 °C to 45 °C   41 °F to 113 °F
Storage temperature range	-40 °C to 70 °C   -40 °F to 158 °F	-40 °C to 70 °C   -40 °F to 158 °F

Model Number	1401	1401
Number of channels	2 or 4	2 or 4
Sensor	InGaAs wide area detector	InGaAs wide area detector
Wavelength range	750 to 1700 nm	750 nm to 1700 nm
Power	-60 to +10 dBm	-60 dBm to +10 dBm
Damage level	+12 dBm	+12 dBm
Uncertainty <sup>2,3,5</sup>	± 0.29 dB (Typical)   ± 0.50 dB (Max)	± 0.29 dB (Typical)   ± 0.50 dB (Max)
Linearity <sup>2,5</sup>	± 0.1 dB, -40 to 0 dBm; ± 0.2 dB, -50 to -40 dBm	± 0.1 dB, -40 to 0 dBm; ± 0.2 dB, -50 to -40 dBm
Return loss <sup>6</sup>	>45 dB	> 45 dB
Averaging time	100 µs to 10 s	100 µs to 10 s
Data logging capability	Up to 1024 samples per channel on channel 1 and 2 only. 1 sample on channels 3 and 4.	Up to 1024 samples per channel on channel 1 and 2 only
External trigger	Yes	No


### Notes

- Specifications are valid at 23 °C ± 3 °C.
- +10 dBm to -40 dBm, 23 °C.
- Excluding connectors.
- < 10 dB attenuation.

- At calibration wavelengths.

- Wavelength 1550 nm ± 30 nm, standard single-mode fiber, angled connector 8°, T=23 °C ± 5 °C.

## ORDERING INFORMATION

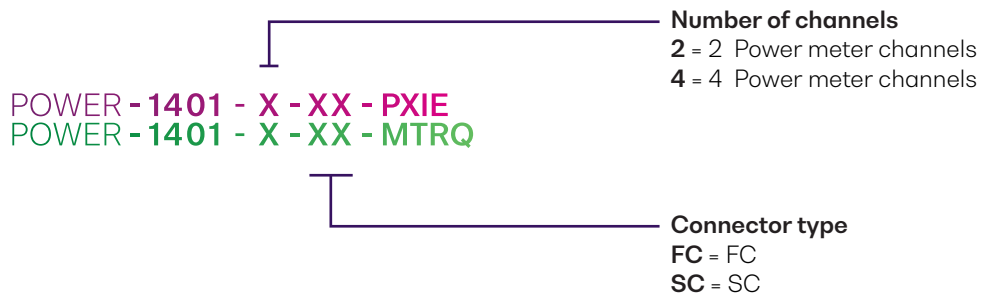

## WARRANTY INFORMATION

This product comes with a standard 3 year warranty.

An optional 5 year extended warranty is also available, please discuss with your sales representative at the time of purchase.

Our portfolio of optical and electrical test modules is rapidly expanding to meet a wide range of customer requirements and applications.

#### Tunable Laser Sources

Versatile telecom laser sources with full tunability across C or L bands. Narrow 100 kHz linewidth, up to 16.5 dBm of power, optional whisper mode to disable frequency dither.

#### Erbium-Doped Fiber Amplifier (EDFA)

High power Erbium-Doped Fiber Amplifier for signal power amplification in C and L bands with various control modes, including automatic gain control.

#### Fixed Wavelength Laser Sources

Highly customizable DFB or FP laser sources available in a wide range of wavelengths and powers. Models support SMF, MMF and PMF.

#### Variable Optical Attenuator (VOA)

Fast attenuation speed with low insertion loss and built-in power monitoring. Operates in fixed attenuation or constant output power modes. Models support SMF, MMF and PMF.

#### Optical Power Meters

Fast terminating or inline monitoring of optical signal power from -60 to +10 dBm across 750 – 1700 nm wavelengths. Model with logarithmic analog output for applications such as silicon photonics fiber alignment.

#### Optical Spectrum Analyzer (OSA)

Low cost, fast spectral measurement in a compact module with built-in analysis including SMSR, OSNR and spectral width. Targeted wavelengths for specific applications in O band, C band and L band.

#### Optical-to-Electrical Converter

High bandwidth, broadband O-to-E converter. Available in a range of configurations; choose from 1 or 2 channels, AC or DC coupling and various conversion gain and operating wavelength ranges.

#### Bit Error Rate Tester (BERT)

2 or 4-channel Pulse Pattern Generator and Error Detector at rates up to 29 Gbps for the design, characterization and production of optical transceivers and opto-electrical components.

#### Pulse Pattern Generator (PPG)

4 channel Pulse Pattern Generator from 0.3 to 30 Gbps for high-density multichannel applications. With integrated clock synthesizer and programmable de-emphasis and CTLE processor.

#### Optical Switch

Proven reliability and fast switching time. Wide variety of switch configurations: 1x4, 1x16, 16x16 and more. Models support SMF, MMF and PMF.

#### Polarization Controller & Scrambler

High-speed automated polarization control with broad wavelength coverage from 1260nm to 1650nm, low insertion loss and back reflection. Full remote control via intuitive GUI, LabVIEW or SCPI.

#### Photonic Doppler Velocimeter (PDV)

Purpose-built module for Photonic Doppler Velocimetry (PDV). A circulator, two VOAs and a passive coupler all built into one compact module.

#### Passive Component Integration

Integrate passive optical components of your choice such as WDM couplers, splitters, band-pass filters, PM beamsplitters and circulators. Models support SMF, MMF and PMF.

#### Passive Component Storage

Protect and store your own passive fiber optic components such as splitters, connector adaptor patchcords, WDM couplers, and isolators in one handy module.

PXI – TEST MODULES

MATRIQ – TEST MODULES

We provide these products as PXIe modules and compact MATRIQ benchtop instruments.

See our website for more details  
[quantifiphotonics.com/products](https://quantifiphotonics.com/products)

# Test. Measure. Solve.

Quantifi Photonics is transforming the world of photonics test and measurement. Our portfolio of optical and electrical test instruments is rapidly expanding to meet the needs of engineers and scientists around the globe. From enabling ground-breaking experiments to driving highly efficient production testing, you'll find us working with customers to solve complex problems with optimal solutions.

**To find out more, get in touch with us today.**

**General Enquiries**  
**Technical Support**  
**Phone**  
**North America**

[sales@quantifiphotonics.com](mailto:sales@quantifiphotonics.com)  
[support@quantifiphotonics.com](mailto:support@quantifiphotonics.com)  
+64 9 478 4849  
+1-800-803-8872



[quantifiphotonics.com](https://www.quantifiphotonics.com)

**QUANTIFI**  
**PHOTONICS™**